




Rotolight SmartSoft™ Box

Installation Guide



1. The SmartSoft™ Box is compatible with the AEOS 2 and AEOS 2 Pro.

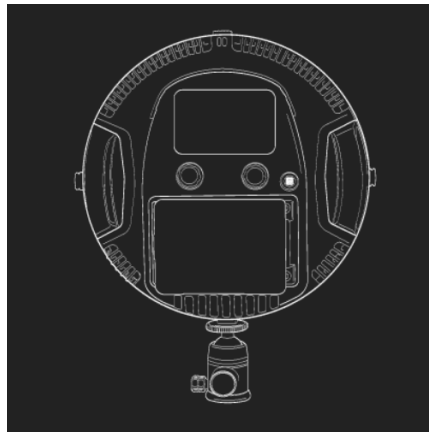


2. Update your AEOS 2 or AEOS 2 Pro to the latest firmware www.rotolight.com/support



3. You'll need the Rotolight SmartSoft™ Box, 1x Small 1/4" knob and 2x Large M8 knobs.

NOTE – if you are using the AEOS yoke you do not need the 2x Large knobs Supplied with the SmartSoft™ Box.

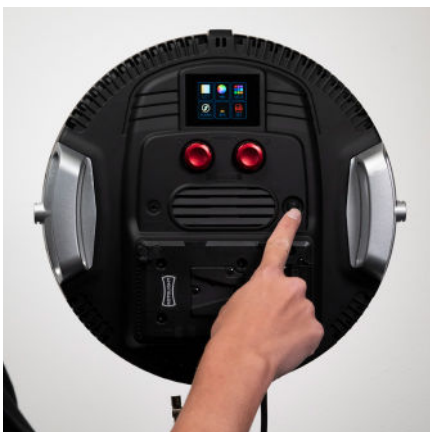

4. Turn off the AEOS 2/AEOS 2 Pro and remove the Standard Diffuser or Barndoors if they are installed.



5. Attach the SmartSoft™ Box and secure with the small knob, don't fully tighten at this point.

NOTE – if you have the AEOS Yoke installed loosen the larger knobs before installing the SmartSoft™ Box and small knob.



6. Install the 2x Large M8 knobs and fully tighten them and the small knob.

NOTE – if you have the AEOS Yoke installed now tighten the larger knobs and small knob.



7. Connect the SmartSoft™ Box control cable to the AEOS 2 / AEOS 2 Pro.



8. Turn ON the AEOS 2 / AEOS 2 Pro.



9. In CCT press the bottom left icon twice to cycle between the brightness and SmartSoft™ control.



10. Used the on-screen slider or left Red Control dial increase and decrease the amount of diffusion. You are now ready to shoot!

How to uninstall SmartSoft™ Box



1. To Remove the SmartSoft™ Box turn OFF the AEOS 2 / AEOS 2 Pro.




2. Disconnect the Control cable from the AEOS 2 / AEOS 2 Pro.



3. Loosen the 2x Larger knobs



4. Remove the small 1/4" knob and then the SmartSoft™ Box

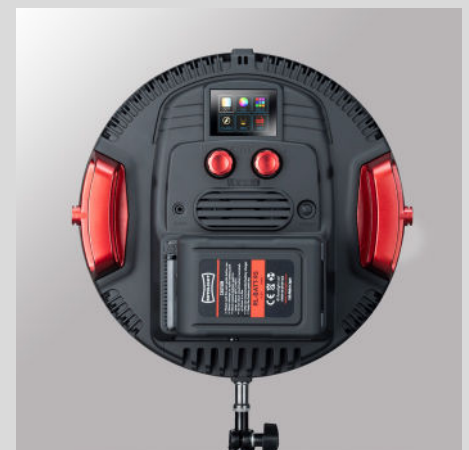

5. Now you are ready to attach our other light Modifiers
<https://www.rotolight.com/product-category/light-modifiers/>